


## LED Moodulvalgusti ELA ADV2



- Tridonicu driver
- Süvispaigaldus  
(pindpaigalduseks ja riputamiseks eraldi tarvikud)
- Sobib paigalduseks 600x600 moodullakke
- Värviedastusindeks CRI > 80
- Värvitolerants 4 MacAdam'i sammu
- UGR <19
- Eluiga 50 000h
- PMMA


### TRIDONIC

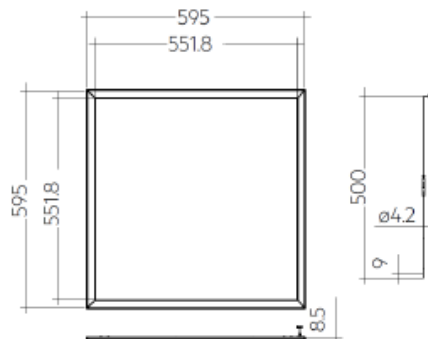

Tootekood	Nimetus	Mõõdud	Võimsus	Valgusvoog	Efektivsus	Värvi temp.	CRI
28003275	ELA 600x600mm 3800lm 840 ADV2	595x595x 8,5mm	31.6W	3432lm	110lm/W	4000K	> 80
28003274	ELA 600x600mm 3800lm 830 ADV2	595x595x 8,5mm	31.6W	3404lm	109lm/W	3000K	> 80

Type®	Article number	Photometric code	Useful luminous flux at tp = 25 °C®	Expected luminous flux at tp rated®	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C®	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
<b>Operating mode HE at 600 mA</b>											
ELA 600x600mm 3800lm 840 ADV2	28003275	840/469	-	2,605 lm	600 mA	36.9 V	40.2 V	23.2 W	-	113 lm/W	> 80
<b>Operating mode NM at 800 mA</b>											
ELA 600x600mm 3800lm 840 ADV2	28003275	840/469	3,670 lm	3,432 lm	800 mA	37.6 V	41.1 V	31.6 W	116 lm/W	110 lm/W	> 80
<b>Operating mode HO at 900 mA</b>											
ELA 600x600mm 3800lm 840 ADV2	28003275	840/469	-	3,811 lm	900 mA	38.0 V	41.5 V	35.9 W	-	107 lm/W	> 80

Type®	Article number	Photometric code	Useful luminous flux at tp = 25 °C®	Expected luminous flux at tp rated®	Typ. forward current	Min. forward voltage at tp = 45 °C	Max. forward voltage at tp = 25 °C	Power consumption Pon at tp = 25 °C®	Efficacy of the module at tp = 25 °C	Expected efficacy of the module at tp rated	Colour rendering index CRI
<b>Operating mode HE at 600 mA</b>											
ELA 600x600mm 3800lm 830 ADV2	28003274	830/469	-	2,586 lm	600 mA	36.9 V	40.2 V	23.2 W	-	112 lm/W	> 80
<b>Operating mode NM at 800 mA</b>											
ELA 600x600mm 3800lm 830 ADV2	28003274	830/469	3,620 lm	3,404 lm	800 mA	37.6 V	41.1 V	31.6 W	115 lm/W	109 lm/W	> 80
<b>Operating mode HO at 900 mA</b>											
ELA 600x600mm 3800lm 830 ADV2	28003274	830/469	-	3,780 lm	900 mA	38.0 V	41.5 V	35.9 W	-	106 lm/W	> 80

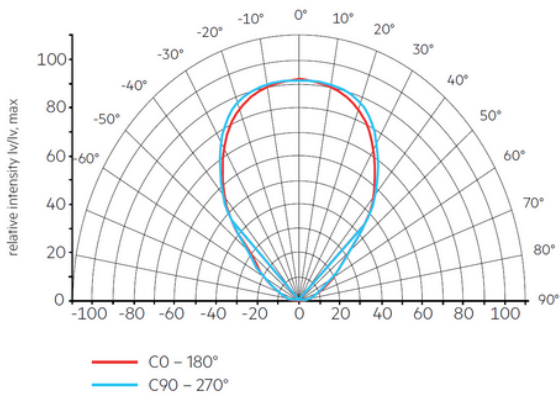

Type	Article number	Colour	Packaging	Weight per pc.
ACE Surface mount kit 600mm AL WH G2	28003372	White	20 pc(s).	0.483 kg
ACE Suspension kit 600-625mm STL SI G2	28003374	Silver	100 pc(s).	0.097 kg

